(51) International Patent Classification 7 : H04B 7/005, 7/26	A1	(11) International Publication Number: WO 00/19635
		(43) International Publication Date: 6 April 2000 (06.04.00)

(21) International Application Number: PCT/FI99/00763

(22) International Filing Date: 16 September 1999 (16.09.99)

(30) Priority Data:
982121   30 September 1998 (30.09.98)   FI

(71) Applicant *(for all designated States except US)*: NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN–02150 Espoo (FI).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: SALONAHO, Oscar [FI/FI]; Oksasenkatu 4bA 8, FIN–00100 Helsinki (FI). LAP-PETELÄINEN, Antti [FI/FI]; Vallikuja 4 B 12, FIN–02600 Espoo (FI).

(74) Agent: PATENT AGENCY COMPATENT LTD.; Pitkänsillanranta 3B, FIN–00530 Helsinki (FI).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.
In English translation (filed in Finnish).

(54) Title: POWER CONTROL IN A RADIO SYSTEM

(57) Abstract

The invention concerns a method of power regulation in a radio system including at least two transmitters, e.g. base transceiver stations, transmitting at the same frequency and receivers, e.g. mobile stations, which have set up a radio communication with the former. In the method according to the invention, the results of measurements of co–channel adjacent transmitter signals are used, besides the results of measurements of the radio communication to be relayed, in making the power regulation decision. From the results of measurements of adjacent transmitter signals to be transmitted with the monitored radio communication at the same frequency and in the same time slot, an estimate is determined of that interference caused to the radio communication, which is to be compensated for by a regulation of the transmission power of the desired signal.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Power control in a radio system

Field of the invention

The invention concerns power regulation in a radio system, such as
5   a cellular radio system, in connection with radio links or in an ad-hoc net-
work.

Technical background

In a mobile communications system, regulation of the transmission
10   power is performed in the mobile station MS and/or at the base transceiver
station BTS in order to lower the network's interference level and to compen-
sate for fading on the radio path. Usually, the objective of power regulation is
constantly to preserve the received signal almost at the same power level,
which is as low as possible, however, in such a way that the quality of the
15   received signal will not suffer. When the level and/or quality of the signal in
the radio communication between the mobile communications network and
the mobile station drops below the desired level, regulation of the transmis-
sion power may be carried out at the base transceiver station and/or in the
mobile station MS in order to improve the radio communication. The trans-
20   mission power of the mobile station MS is usually regulated from the fixed
network with the aid of a special power regulation algorithm.

Figure 1 in the appended drawing shows a simplified block diagram
of the GSM system (Global System for Mobile communications). The mobile
station MS is connected over the radio path with some base transceiver sta-
25   tion BTS, which is base transceiver station BTS1 in the case shown in Figure
1. The Base Station Sub-system BSS includes a Base Station Controller
BSC and subordinated base transceiver stations BTS. Usually, there are
several base station controllers BSC subordinated to a Mobile Services
Switching Centre MSC. The mobile services switching centre MSC is con-
30   nected to other mobile services switching centres, and through a Gateway
Mobile Services Switching Centre GMSC the GSM network is connected with
other networks, such as a public switched telephone network PSTN, another
public land mobile network PLMN or an ISDN network. The operation of the
whole system is monitored by an Operation and Maintenance Centre OMC.

The mobile station MS measures the reception level (field strength) and quality of the downlink signal received from the base transceiver station BTS1 of the serving cell, while the base transceiver station BTS1 of the serving cell for its part measures the reception level (field strength) and qual-

5   ity of the uplink signal received from the mobile station MS. Based on these measurement results and on the established power regulation parameters, the power regulation algorithm determines a suitable transmission power level at the base transceiver station and/or in the mobile station. The transmission power level determined for the mobile station is made known to the

10   mobile station MS in a power regulation instruction. Power regulation is carried out constantly during a call, e.g. in a GSM system of the TDMA type typically twice a second, and in a UMTS-WCDMA system (Universal Mobile Telecommunication System - Wide band CDMA) of the CDMA type 1600 times a second.

15   A known power regulation algorithm is C-based power control, wherein the determination of the transmission power is based on the power level C received from the radio communication. In this algorithm, the transmission power is the same for such radio communications which have the same attenuation over the radio path. Figure 2 shows such a situation as an

20   example, where mobile stations MS1 and MS2 in radio communication with a base transceiver station BTS1 are located at an equal distance attenuation from this serving base transceiver station. In the situation shown in Figure 2, the signal is transmitted to the mobile stations from the serving base transceiver station BTS1 at equal transmission powers, although they are located

25   in interference fields of different magnitudes, because mobile station MS1 receives more interference than mobile station MS2 from base transceiver station BTS2, which is operating at the same frequency. Thus, the problem with C power regulation is the inefficiency of the power regulation as regards co-channel interference.

30   Another known power regulation algorithm is C/I-based power control, wherein the transmission power determination is based on the quality of the signal received from the radio communication, which is measured from the received useful signal. Since the quality of the useful signal is also affected by the interference level of the reception, besides being affected by

35   the received power level, the transmission from base transceiver station

BTS1 in the situation shown as an example in Figure 2 is at a higher trans-
mission power to mobile station MS1 than to mobile station MS2. Hereby, the
downlink transmission power is used to compensate for the co-channel in-
terference received by the mobile station from other base transceiver sta-_
5   tions. However, the high variation of interference is a problem with C/I power
regulation, because C/I power regulation reacts to changes in the interfer-
ence level with a delay, due to a delay in the signalling of measurement re-
sults, among other things. A high variation of interference will have the time
to lower before the power regulation is able to compensate for the increase
10 in interference, and also to increase to disturb the radio communication just
when the power regulation has time to react to the low interference by re-
ducing the transmission power. Such a variation of interference occurs e.g.
in connection with techniques which make interference occur at random,
such as frequency hopping and dynamic channel allocation, and/or in con-
15 nection with packet data transmission.

Thus, the problem with the above-mentioned power regulation al-
gorithms is the interference signals transmitted at the same frequency as the
radio communication, especially in connection with co-channel interference
occurring with a variation of interference.
20

Brief summary of the invention

It is the purpose of this invention to bring about an efficient power
regulation method, especially in an environment where variation of interfer-
ence occurs.

25   This objective is achieved with a method in accordance with the in-
vention, which is characterised by that which is said in the independent
claims. Special embodiments of the invention are presented in the depend-
ent claims.

The invention is based on the idea that the power regulation deci-
30 sion uses the measurement results of co-channel adjacent transmitter sig-
nals, besides the measurement results of the radio communication to be re-
layed. From the measurement results of the adjacent transmitter signals
transmitted at the same frequency and in the same time slot as the moni-
tored radio communication, an estimate is determined of that interference
35 caused to the radio communication which is to be compensated for by regu-

lating the transmission power of the desired signal. The estimate of the interference caused to the radio communication is preferably based on the geographical location of the interference source and on the long-term behaviour of the interference power. Hereby the power regulation will react to the average interference value only, not to any individual instantaneous interference value. Thus, in a cellular radio network the power regulation is based on the network's cell isolation seen from the mobile station's viewpoint, that is, on the radio-technical degree of isolation of co-channel cells.

It is an advantage of the power regulation in accordance with the invention that it is efficient and stable in an environment with variable interference and especially in the radio network of irregular cells and/or in a cellular radio network, wherein there are short frequency reuse distances. The power regulation in accordance with the invention is especially advantageous in a high variance interference field, e.g. when using techniques causing random interference, e.g. frequency hopping, and in packet form transmission.

It is another advantage of the power regulation in accordance with the invention that it does not require any additional traffic or signalling on the transmission path, especially in regard to C/I power regulation.

In addition, it is an advantage of the power regulation in accordance with the invention that it achieves a better C/I distribution in the network than what is achieved with known power regulation techniques.

List of figures

The invention will now be described more closely in connection with advantageous embodiments and referring to the examples shown in Figures 3 - 6 in the appended drawings, wherein:

Figure 1shows those parts of a mobile communications network which are essential to the invention;
Figure 2 shows a situation in a cellular network by way of example;
Figure 3 is a flow chart of the first embodiment of the method according to the invention;
Figure 4 shows another situation in a cellular network by way of example;

Figure 5 shows known power regulations and the power regulation in accor-
dance with the invention in the situation shown as an example in
Figure 4; and

Figure 6 shows as a comparison by way of example the C/I distributions of_
5   known power regulations and of the power regulation according to
the invention.

Detailed description of the invention

The present invention can be applied in connection with any radio
10   system. In the following, the invention is described more closely by way of
examples and primarily in connection with a digital GSM mobile communica-
tions system. Figure 1 shows the structure of a simplified GSM network as
described in the foregoing. Those who are interested will find background
information as regards more detailed descriptions of the GSM system from
15   GSM recommendations and from the book "The GSM System for Mobile
Communications", M. Mouly & M. Pautet, Palaiseau, France, 1992, ISBN:2-
9507190-0-7.

In the following, the invention is described in greater detail in the
light of a first embodiment of the invention and referring to Figure 3.

20   Figure 3 is a flow chart in the downlink direction of a radio commu-
nication of a first embodiment of the power regulation in accordance with the
invention. At point 32, state-of-the-art measurements are performed of the
signal level and possibly of the signal quality of the radio communication as
well as adjacent base transceiver station measurements. The measurement
25   results are transmitted in a state-of-the-art fashion in a report message from
the mobile station to the serving base transceiver station, e.g. in case of a
possible exchange of channel, so no special signalling is required for the
power regulation method of the invention as regards the measurement re-
sults. In accordance with the invention, the channel amplification of the use-
30   ful signal and of interfering co-channel radio signals, that is, the propagation
attenuation on the radio path, is determined at point 34 from the measure-
ment results. At point 36, a new transmission power is determined with the
aid of channel amplifications obtained from the measurement results, e.g.
from some of the calculation algorithms to be presented hereinafter. The

transmission of the radio signal is continued from the serving base trans-
ceiver station at this new determined transmission power (point 38).

The power regulation according to the invention is especially suit-
able for use when close to the reception point there are at least two trans-
5   mitters transmitting at the same radio frequency/on the same radio channel.
In particular, the invention is suitable for use in a mobile communications
system for regulating the transmission power in the downlink direction.
Hereby the regulation of the transmission power of the base transceiver sta-
tion is based on the results of measurements in the mobile station of the de-
10   sired signal and on the results of measurements of interfering base trans-
ceiver station signals. When the mobile station is located close to two base
transceiver stations transmitting at the same time and at the same fre-
quency, the signal of the adjacent base transceiver station will probably in-
terfere with the mobile station's radio communication, irrespective of how far
15   the mobile station is located from the serving base transceiver station. With
the power regulation algorithm, a new transmission power is determined for
the concerned radio communication from the serving base transceiver sta-
tion. The determination is preferably performed at the serving base trans-
ceiver station. The new transmission power may be determined e.g. in ac-
20   cordance with the following formula:

$$P_\alpha = \frac{\left(\sum_{i=1}^{M} G_i P_{mean,i} \right)^\alpha + SN}{G_{own}} \tag{1}$$

wherein G_i is the channel amplification experienced by the individ-
ual interfering co-channel base transceiver station signal on the radio path,
$P_{mean,i}$ is the long-term estimate of each individual interfering co-channel base
25   transceiver station for the transmission power, e.g. the average transmission
power, in the time slot of the radio communication, α is the optimising pa-
rameter, S is the signal-to-noise ratio required of the desired radio communi-
cation in reception, N is the noise power and G_{own} is the channel amplification
experienced by the desired signal, that is, the serving radio communication,
30   on the radio path. The sum term Σ is used for calculating the total interfer-
ence caused by individual adjacent base transceiver station signals causing
co-channel interference, whereby the base transceiver station index i is be-

tween one and M. In formula 1, the magnitudes are presented in linear units, but the same formula may of course be presented also with logarithm magnitudes.

Channel amplifications G_i and G_{own} are actually propagation losses

5   of the radio signal, and as a coefficient they are thus less than one. Channel amplification G_i is determined from the measurement results C_i of the adjacent base transceiver station signals supplied by the mobile station to the network by calculating $G_i=C_i/P_{läh}$, when the network contains information about the real transmission powers $P_{läh}$ of adjacent base transceiver stations.

10   Naturally, the channel amplification G_i is not determined during pauses in the transmission. Correspondingly, the channel amplification G_{own} experienced by the useful signal is obtained from the measurement results P_{vast} of the radio communication supplied by the mobile station to the network by calculating e.g. $G_{own}=P_{vast}/P_{läh}$.

15   The estimate $P_{mean,i}$ of the interfering transmission power is obtained e.g. by calculating from the measurement results of the measurement report or from the real transmission powers of each base transceiver station. $P_{mean,i}$ may also be determined from the real traffic in the network, whereby the interfering transmission power may even be foretold, since the base sta-

20   tion controller knows the following transmission power of the base transceiver stations. If it is desirable to ensure a sufficient power regulation, the maximum power may be used as the interfering transmission power estimate, that is, $P_{mean,i} = P_{max,i}$. Hereby $P_{mean,i}$ may also be replaced by some other constant, if required, or by some other such value instead of the mean,

25   which is determined from the transmission powers. The $P_{mean,i}$ value may be signalled in the network to those network elements which need this information.

The optimising parameter α may be used for optimising the transmission power value obtained with the calculation algorithm. This parameter

30   can be set at any suitable value, e.g. the operator may set this parameter at a value which has been found to be good by experiments.

The signal-to-noise ratio S is determined from the signal-to-noise ratio needed by the mobile station and/or according to the service. The network operator usually sets this value. Noise power N is a standard parameter

35   established in the network. The term SN may be disregarded when calculat-

ing the new transmission power, when the minimum power is sufficient, e.g. indoors.

To the sum Σ are added the interfering base transceiver stations, preferably in an order of interference so that the one which interferes the_

5   most is calculated first and the one which interferes least is added last. Hereby, at a value of M=1 for the top limit of the sum, the interference concerned is the only interference or a dominating interference, and no other interference need then be taken into account in the calculation.

If the mobile communications system uses interference elimination

10   in order to eliminate the strongest interfering signal entirely or partly from the received signal, a new transmission power can be determined using an algorithm in accordance with formula 2.

$$P_\alpha = \frac{\left(\sum_{i=1}^{M} G_i(r_i P_{mean,i})\right)^\alpha + SN}{G_{own}};$$

$$r_i = \begin{cases} f\left(I_{dom}/I_{others}\right); & if\ G_i = \max(G) \\ 1 & ; \quad otherwise \end{cases}$$

(2)

wherein, besides the magnitudes occurring in formula 1, r_i is a co-

15   efficient obtaining a value of one for other base transceiver stations than the one causing the greatest interference, the signal of which is thus eliminated in the interference elimination, and $f(I_{dom}/I_{others})$ is a constant within a range of 0-1. Hereby, owing to the interference elimination e.g. carried out by the mobile station, the adjacent base transceiver station signal which interferes the

20   most can be left entirely out of the calculations in the power regulation algorithm or it may be taken into account with less weight than for the others.

In the sum term of the power regulation algorithms presented above, all measured co-channel interference may be included or only a set of the measured co-channel interference may be included. The P_{tx} deter-

25   mined by using the formulas presented above will increase when the value of the interference term increases and it will decrease when the value of the interference term decreases. Hereby the serving base transceiver station's transmission power is high for a mobile station located in a field of high average interference.

30   Using the method according to the invention it is also possible in the network to regulate the transmission power of several base transceiver

stations to be suitable for each radio communication, so that any interference caused by others is compensated for by a new transmission power. The following is an example of a regulation algorithm in the power regulation of three base transceiver stations in accordance with the invention:

$$
\begin{cases}
P_{tx1} = \dfrac{\left(\sum\limits_{i=2}^{3} G_i P_{tx,i}\right)^{\alpha} + SN}{G_1} \\[3ex]
P_{tx2} = \dfrac{\left(\sum\limits_{i=1,3} G_i P_{tx,i}\right)^{\alpha} + SN}{G_2} \\[3ex]
P_{tx3} = \dfrac{\left(\sum\limits_{i=1}^{2} G_i P_{tx,i}\right)^{\alpha} + SN}{G_3}
\end{cases}
\tag{3}
$$

wherein in the sub-index of channel amplifications G and powers P, a number indicates the base transceiver station to which the magnitude is related. Channel amplifications G_i are determined in relation to the concerned radio communication based on the measurement results of the mobile station. From formula 3 new transmission powers P_{tx1}, P_{tx2} and P_{tx3} are solved from the group of equations on the condition that no one of these is less than the minimum power or in excess of the maximum power.

For the calculation algorithms presented above, the determination of channel amplification G_i is done either on the network side, e.g. at the base transceiver station or in the base station controller, or in the mobile station, to which the real transmission power information has been supplied from the network. If determination of the new transmission power is done in mobile station MS, the mobile station will transmit to the network a power regulation instruction as a result of the calculation for regulating the transmission power in the downlink direction. With the aid of channel amplification, an interfering co-channel adjacent base transceiver station signal can be taken efficiently into account in the power regulation, in spite of the variable character of the interference, because channel amplification is a magnitude which is more stable than the interference and it will remain essentially the same when the mobile station is moving only slightly.

Figure 4 shows by way of example another situation in a cellular network, where the coverage areas of co-channel base transceiver stations BTS1 and BTS2 cross each other in the crossing area of buildings 40 - 46. When mobile station MS is in radio communication with base transceiver

5   station BTS1, e.g. in the form of a call or a data transmission, and MS is at the same time moving in the direction shown by the arrow in the figure, the mobile station will enter the coverage area of base transceiver station BTS2 for a short time beginning from point P indicated in the figure. With the aid of power regulation in accordance with the invention, the interference situation

10   formed in the example shown by the figure can be quickly compensated for in a manner which is more efficient than with known power regulation methods, especially so when the interfering co-channel transmission of base transceiver station BTS2 is in packet form or otherwise of a variable level.

For the sake of comparison, Figure 5 shows the effect of different

15   power regulation methods in the situation shown in Figure 4. The bottom curve in the figure shows the co-channel interference level I experienced by the mobile station, while the horizontal line G_{own} shows how the channel amplification of the radio communication reduces in relation to the distance. Thus, in order to make the presentation clearer, the G_{own} level is shown as

20   standard, even though according to the example shown in Figure 4 it is evenly declining as the mobile station is moving radially away from base transceiver station BTS1.

In Figure 5, the effect of the known C power regulation on the transmission power of base transceiver station BTS1 is shown by a horizon-

25   tal line C. Thus, the C power regulation does not in any way take into account the increased interference level emerging at point P marked by a vertical line in Figure 5. In fact, a relatively large interference margin must be used in C power regulation.

Curve C/I indicates the reaction of the known C/I power regulation

30   to changes in the interference level. The transmission power of base transceiver station BTS1 is hereby constantly regulated with a slight delay in relation to changes in the interference level, as can be seen e.g. from the point of the auxiliary line a drawn in the figure. The transmission power is regulated continuously to take into account all changes in the interference level,

35   so the C/I curve will follow the interference level curve I.

The effect of power regulation according to the invention on the transmission power of base transceiver station BTS1 is illustrated by a curve marked by the word NEW in the figure. Hereby the transmission power of the base transceiver station will remain essentially standard in spite of slight
5   variations in the interference level and it will react quickly to any increase of the mean value of the interference after point P.

Figure 6 further shows C/I distributions of the above-mentioned power regulation methods in the situation shown as an example in Figure 4, when the mobile station experiences an unexpected increase in the interfer-
10   ence and the interfering transmission is in packet form. The distributions of different power regulation methods are again marked with references C, C/I and NEW respectively in Figure 6. It can be seen in the figure that the power regulation in accordance with the invention provides the narrowest and thus the best C/I distribution.

15   The explanation given above is mainly a description of regulation of the transmission power of a base transceiver station in a cellular radio system. The method in accordance with the invention is also suitable for power regulation of a radio communication between a transmitter-receiver pair in other radio systems. Hereby the base transceiver station presented above
20   generally means a transmitter while the mobile station means a receiver, whereby in accordance with the invention the transmitter's transmission power is regulated on a basis of results of measurements of the signals of the radio communication and of adjacent transmitter signals performed by the receiver. In such radio systems, where the receiver due to some other
25   functionality does not supply measurement results to the transmitter, the measurement results are supplied from receiver to transmitter when required in connection with the power regulation method according to the invention.

The drawings and the related explanation are only intended to il-lustrate the inventive idea. As regards the details, the power regulation in ac-
30   cordance with the invention may vary within the scope defined by the claims. Although the invention has been explained above mainly in connection with a GSM system, the method may be used also in other radio systems, e.g. in a GSM EDGE system, which is the GSM system of the future with modulation adaptation, in a WLAN system (Wireless Local Area Network) and in a
35   CDMA system on a common channel before the initial power regulation is

found out, especially in a WCDMA system (Wide band Code Division Multiple Access). In a CDMA system, the power regulation in accordance with the invention has the advantage over a SIR based power regulation that no SIR estimate need to be requested from the mobile station before the transmis-
5   sion of each data burst, so the user data rate increases, and the interference estimation of the method according to the invention is more precise than the individual SIR estimate when the interference level varies greatly. The determination of the new transmission power according to the invention may be carried out also with the aid of other calculation algorithms than those pre-
10   sented above at the base transceiver station/in the transmitter and/or in the mobile station/in the receiver. In the present application, radio systems also mean radio links and ad-hoc networks.

Claims

1. Method of power regulation in a radio system including at least two transmitters (BTS1, BTS2) transmitting at the same frequency and receivers (MS1, MS2), which have set up a radio communication with some_
5　transmitter (BTS1), in which method the signal of the radio communication and of the other transmitters (BTS2) is measured in the receiver (MS), c h a r a c t e r i z e d in that in the method the transmission power of the transmitter (BTS1) is regulated in the radio communication based on the results of performed measurements of the radio communication and adjacent trans-
10　mitter signals.

2. Method as defined in claim 1, c h a r a c t e r i z e d in that based on the results of measurements of the adjacent transmitter signals, the attenuation on the radio path of at least one adjacent transmitter signal is determined and the transmission power is regulated based on the signal of
15　the radio communication and on the determined attenuations.

3. Method as defined in claim 2, c h a r a c t e r i z e d in that the total interference caused by adjacent transmitters (BTS2) is calculated with the aid of the determined attenuations and a long-term transmission power estimate of each adjacent transmitter signal, and the transmission power is
20　regulated based on the signal of the radio communication and on the calculated total interference.

4. Method as defined in claim 2 or 3, c h a r a c t e r i z e d in that the transmission power of the transmitter (BTS1) is increased, when the interference caused by adjacent transmitter signals is great, and the transmit-
25　ter's (BTS1) transmission power is reduced, when the interference caused by adjacent transmitter signals is small.

5. Method as defined in claim 2, c h a r a c t e r i z e d in that
the measurement results are supplied from the receiver (MS) to the transmitter (BTS1) of the radio communication, and
30　the attenuation of adjacent transmitter signals is determined in the transmitter (BTS1) of the radio communication.

6. Method as defined in claim 2, c h a r a c t e r i z e d in that
the attenuation of adjacent transmitter signals is determined in the receiver (MS), and
35　the transmission power regulation information is supplied from the receiver (MS) to the transmitter (BTS1) of the radio communication.

7. Method as defined in claim 3, c h a r a c t e r i z e d in that the total interference caused by adjacent transmitters is calculated in the base station controller (BSC).

8. Method as defined in claim 7, c h a r a c t e r i z e d in that the_
5   power regulation requirement of several radio communications is determined in the base station controller (BSC), so that the new transmission power of each radio communication is determined taking into account the new transmission power of the other communications.

9. Method as defined in claim 1, c h a r a c t e r i z e d in that fre-
10 quency hopping is used in the radio communication.

10. Method as defined in claim 1 or 9, c h a r a c t e r - i z e d in that the transmission in the radio communication is in packet form.

11. Power regulation method in a mobile communications system including two base transceiver stations (BTS1, BTS2) transmitting at the
15 same frequency and mobile stations (MS1, MS2), which have set up a radio communication with some base transceiver station (BTS1), in which method the signal of the radio communication and of adjacent base transceiver stations (BTS2) is regulated in the mobile station (MS), c h a r a c t e r i z e d in that in the method the transmission power of the base transceiver station
20 (BTS1) in the radio communication is measured based on the results of performed measurements of the radio communication signal and adjacent base transceiver station signals.
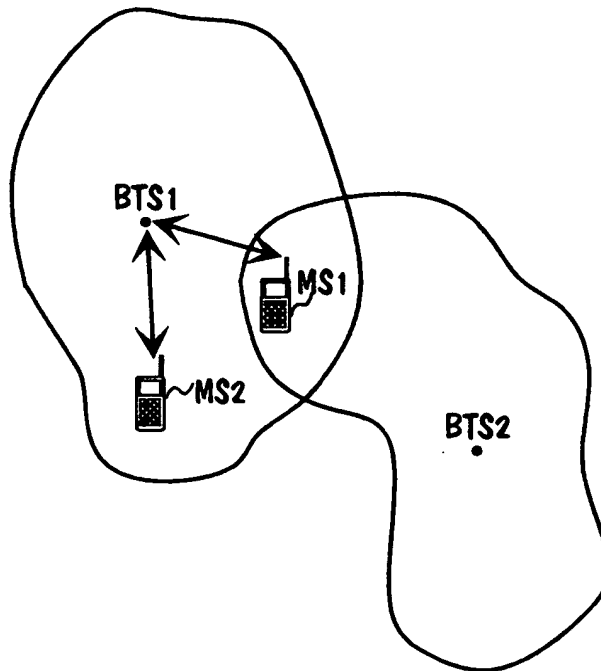
Fig. 1

PSTN
PLMN
ISDN

GMSC

OMC

MSC

BSS

BSC

BSC

BSS

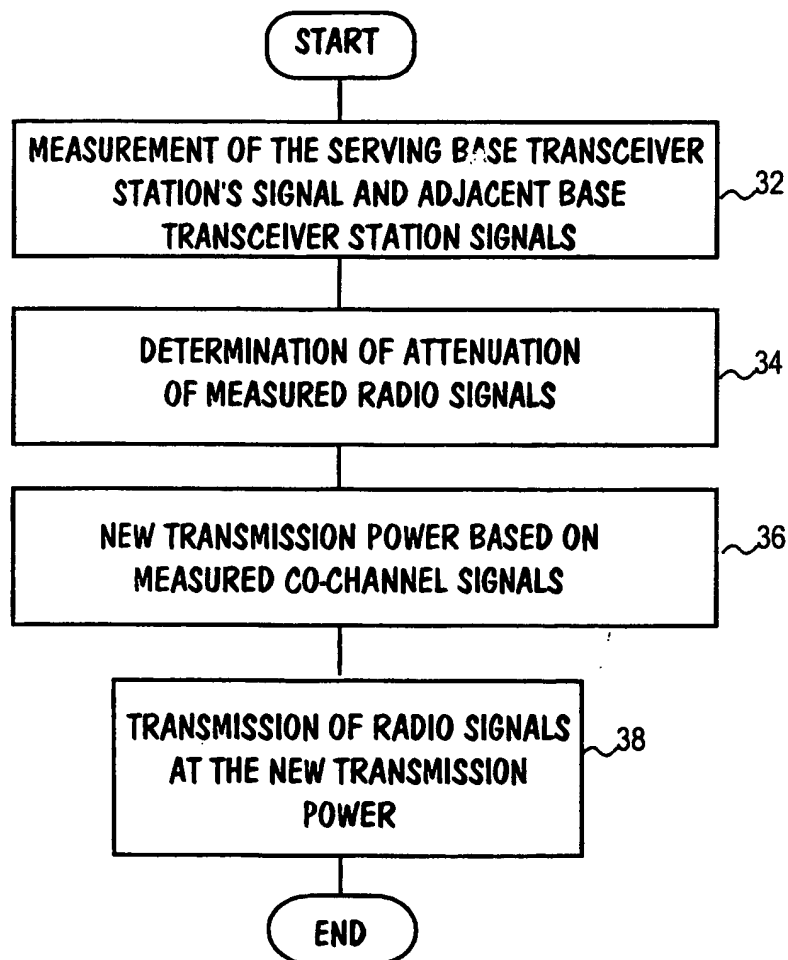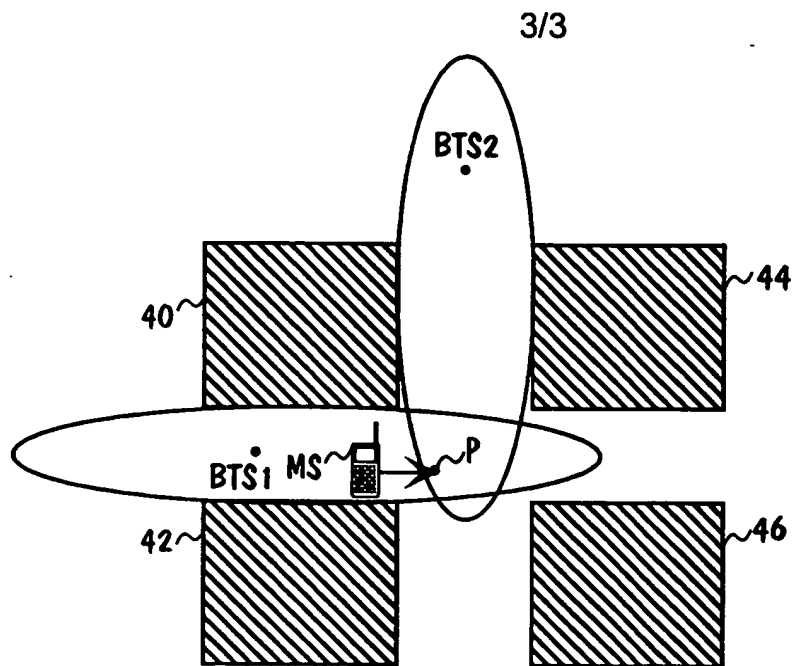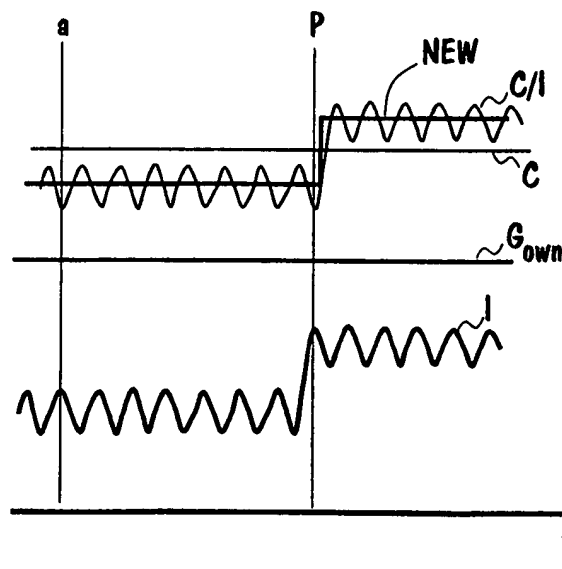BTS1   BTS2   BTS3   BTS4   BTS5

MS
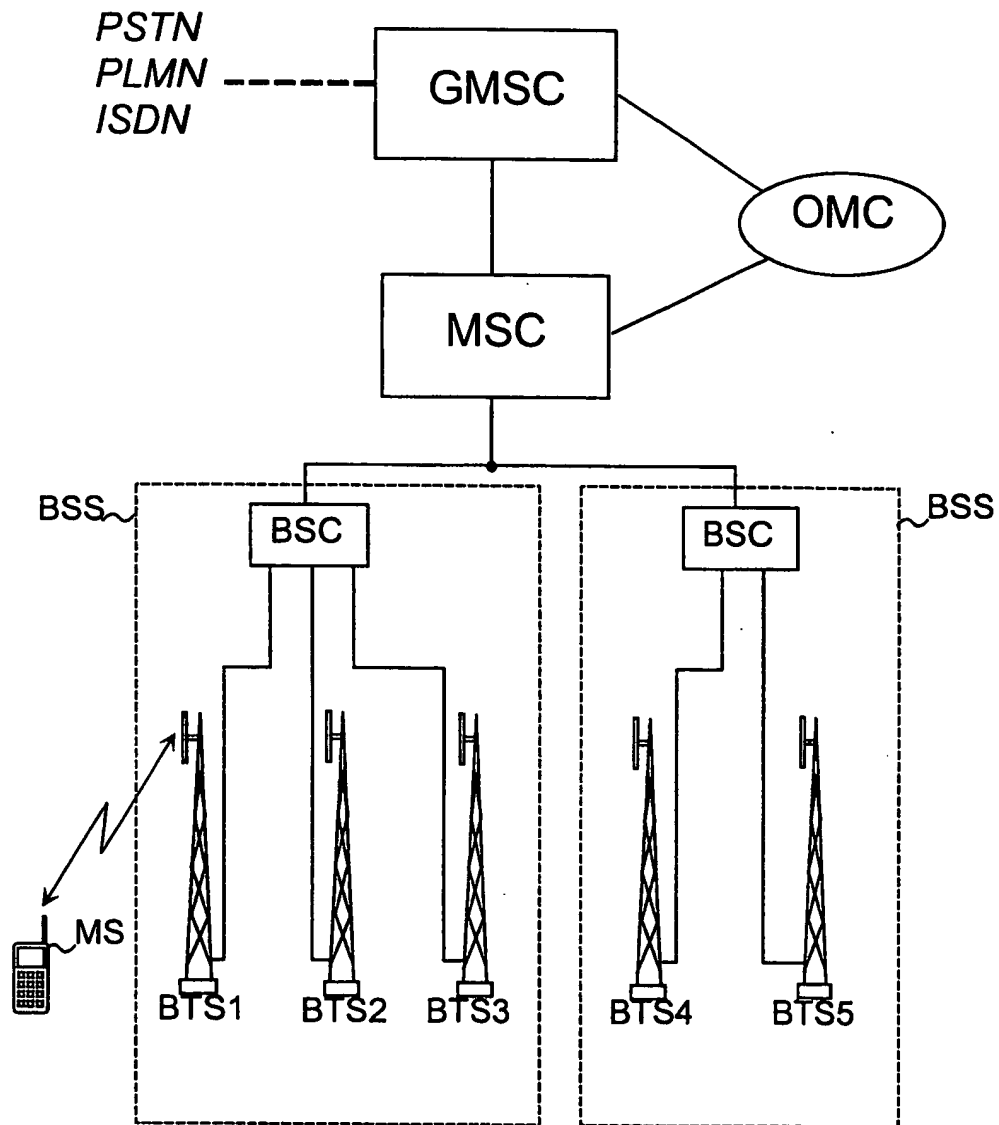
Fig. 2

Fig. 3

Fig. 4

Fig. 5
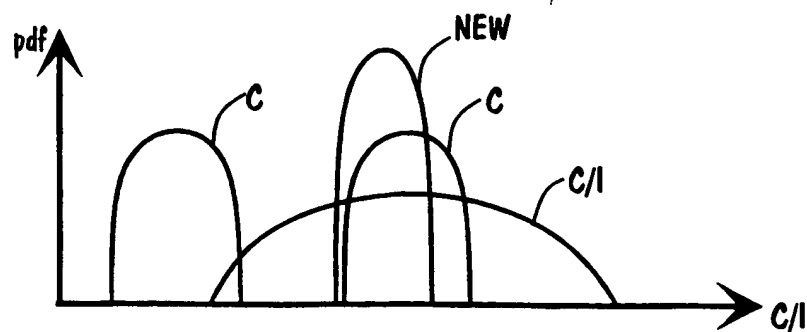
Fig. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00763

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04B 7/005, H04B 7/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04B, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9854853 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 3 December 1998 (03.12.98), page 3, line 18 - page 8, line 18 --	1,11
P,A	IEEE Transaction on Vehicular Technology, Volume 48, No 2, March 1999, Chi Wan sung et al, "The Convergence of an Asynchronous Cooperative Algorithm for Distributed Power Control in Cellular Systems" --	1,11
A	US 5506837 A (MICHAEL SÖLLNER ET AL), 9 April 1996 (09.04.96), column 5, line 59 - column 6, line 5 --	1,11

[X] Further documents are listed in the continuation of Box C.   [X] See patent family annex.

*	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be of particular relevance		
"E"	erlier document but published on or after the international filing date	"X"	document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
24 February 2000	28 -02- 2000
Name and mailing address of the ISA/ **Swedish Patent Office** Box 5055, S-102 42 STOCKHOLM Facsimile No. + 46 8 666 02 86	Authorized officer Fredrik Blomqvist/cs Telephone No. + 46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/FI 99/00763

C (Continuation).   DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5345448 A (ILKKA KESKITALO), 6 Sept 1994 (06.09.94), column 2, line 8 - line 27	1,11
	--	
A	IEEE Transactions on Vehicular Technology, Volume 41, No 3, August 1992, Jens Zander, "Distributed Cochannel Interference Control in Cellular Radio Systems"	1,11
	--	
P,A	WO 9852375 A2 (NOKIA TELECOMMUNICATIONS OY), 19 November 1998 (19.11.98), page 2, line 8 - line 30, claims 1-8	1,11
	--	

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
WO	9854853	A1	03/12/98	AU SE	7792698 9702046	A A	30/12/98 01/12/98
US	5506837	A	09/04/96	DE EP JP	4304095 0611006 6350519	A A A	18/08/94 17/08/94 22/12/94
US	5345448	A	06/09/94	DE EP SE FI FI JP	69313913 0568212 0568212 96157 921882 6022364	D,T A,B T3 B,C A A	05/03/98 03/11/93 31/01/96 28/10/93 28/01/94
WO	9852375	A2	19/11/98	AU FI	7434498 972024	A A	08/12/98 14/11/98